



CHB150 SERIES

99 - 150 WATT WIDE INPUT DC-DC CONVERTERS SINGLE OUTPUT



FEATURES

- * 99 - 150W Isolated Output
- * Efficiency to 89%
- * 500KHz Switching Frequency
- * 2:1 Input Range
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * Five-Sided Metal Case
- * Half-Brick Size Meets Industrial Standard
- * UL60950-1 Approval
- * Without Tantalum Capacitor Inside
(Except 3.3&5Vout)



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB150-48S33	36-75 VDC	3.3 VDC	0 mA	30 A	25 mA	2.5 A	82	30000uF
CHB150-48S05	36-75 VDC	5 VDC	0 mA	30 A	25 mA	3.6 A	86	30000uF
CHB150-48S12	36-75 VDC	12 VDC	0 mA	12.5 A	25 mA	3.5 A	89	12500uF
CHB150-48S15	36-75 VDC	15 VDC	0 mA	10 A	25 mA	3.5 A	89	10000uF
CHB150-48S24	36-75 VDC	24 VDC	0 mA	6.25 A	25 mA	3.5 A	89	6250uF

NOTE: 1. Nominal Input Voltage 48VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range 48V..... 36-75V
Input Surge Voltage (100ms max.) 48V 100Vdc max.
Under Voltage Lockout 48Vin Power Up 34V
48Vin Power Down 32.5V
Positive Logic Remote ON/OFF (note3&4)
Input Filter Pi Type

GENERAL SPECIFICATIONS:

Efficiency See Table
Isolation Voltage Input/Output 1500VDC min.
Input/Case, Output/Case 1500VDC min.
Isolation Resistance 10⁷ ohm min.
Isolation Capacitance 1000pF typ.
Switching Frequency 500KHz typ.
Operating Case Temperature -40°C to 100°C
Storage Temperature -40°C to +105°C
Humidity 95% RH max. Non condensing
MTBF MIL-HDBK-217F, GB, 25°C, Full Load 900Khrs typ.
Thermal Shutdown Case Temperature 100°C typ.
Dimensions 2.28x2.40x0.50 inches (57.9x61.0x12.7 mm)
Case Material Aluminum
Weight 100g

OUTPUT SPECIFICATIONS:

Voltage Accuracy ±1.0% max.
Transient Response: 25% Step Load Change <500µs.
External Trim Adj. Range ±10%
Ripple & Noise, 20MHz BW(note5)
3.3V & 5V 40mV RMS max.
100mV pk-pk max.
12V & 15V 60mV RMS max.
150mV pk-pk max.
24V 100mV RMS max.
240mV pk-pk max.
Temperature Coefficient ±0.03%/°C max.
Short Circuit Protection Continuous
Line Regulation (note1) ±0.2% max.
Load Regulation (note2) ±0.2% max.
Over Voltage Protection Trip Range, % Vo Nom. 115-140%
Current Limit 110%-140% Nominal Output
Start up time 5ms typ.


NOTE:

1. Measured from high line to low line.
2. Measured from full load to zero load.
3. Logic compatibility open collector ref to -Input
Module on open circuit
Module off 0 to < 0.8VDC
4. Suffix "N" to the model number with negative logic remote on/off.
5. Output ripple and noise measured with 10µF tantalum and 1µF ceramic capacitor across output.
6. Suffix "-C" to the model number with clear mounting insert. (3.2mm DIA.)

CASE HB


All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02, X.XXX= ±0.010
Millimeters: X.X= ±0.5, X.XX=±0.25

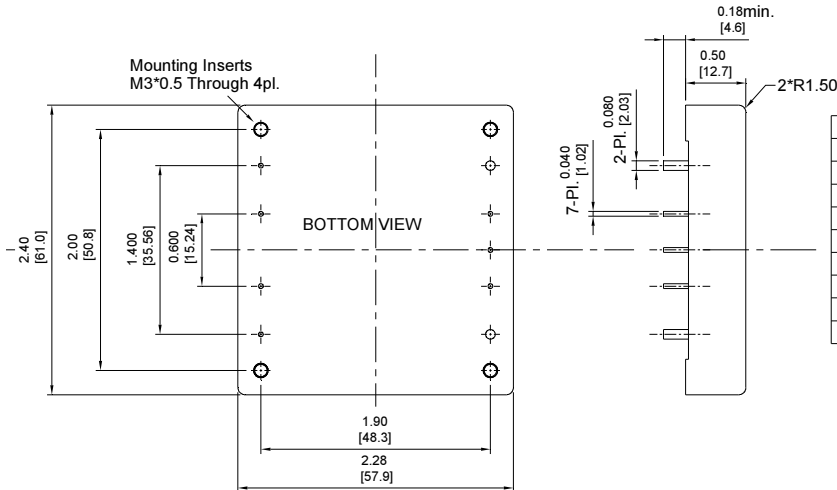

Pin	Function
1	+V Input
2	On/Off
3	CASE
4	-V Input
5	-V Output
6	-Sense
7	Trim
8	+Sense
9	+V Output

REMOTE ON/OFF CONTROL

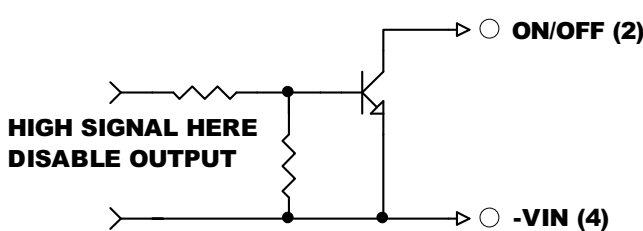

EXTERNAL OUTPUT TRIM

